


# RAC18-IP

## Room Application Controller



MODEL	DESCRIPTION
RAC18-IP	Room Application Controller with a built-in nano EDGE ENGINE

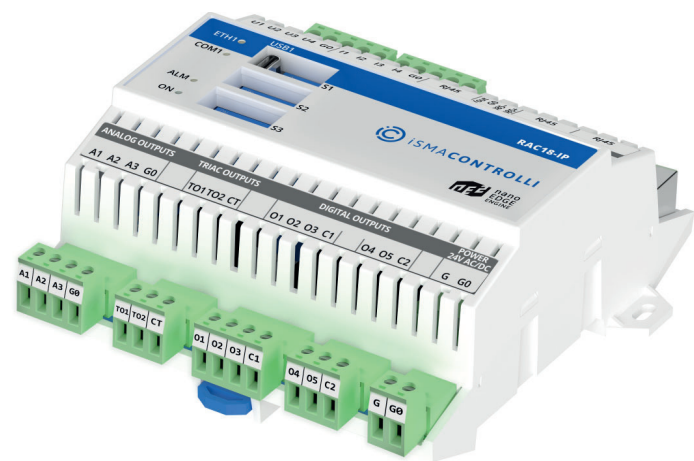

### APPLICATION AND USE

The RAC18-IP is a multifunctional device providing comfort in a single room or a zone in the building. 18 onboard I/O's with Ethernet and serial port make the controller a versatile system for comfort management, light and blind control, and integration and monitoring. The RAC18-IP controller has a built-in nano EDGE ENGINE – the cutting-edge software that allows for constructing multiple applications and provides a set of libraries and components tailored to create cycle-driven user applications. The device has an automatic BACnet IP and Modbus TCP/IP exposure and allows for real-time programming. Maintenance and programming of the device are possible from anywhere in real time with a dedicated, free-of-charge tool. The RAC18-IP ensures an easy replacement process with a system and applications on a removable SD card.

### FEATURES

- Room and zone IP management
  - Openness and reliability
  - Seamless programming and maintenance
  - Built-in nano EDGE ENGINE
  - Cycle-driven multithreaded application
  - Favorable licensing system
  - Reference linking method
  - Clear and logical structure
  - 150 Data Points
- System and applications on SD card
  - 2 fail-safe Ethernet ports with a built-in switch
  - Native BACnet IP and Modbus TCP/IP, BACnet MS/TP and Modbus RTU
  - Built-in real-time clock (RTC)
  - Support for over 20 types of temperature sensors
  - Digital inputs with fast pulse counter
  - Triac outputs for thermal actuators
  - UL listed for U.S. and Canada according to UL 60730-1 and CAN/CSA E 60730-1


### TECHNICAL CHARACTERISTICS

DESCRIPTION		RAC18-IP
Power supply	Voltage	24 V AC/DC $\pm$ 20%
Universal inputs	Number of inputs	4
	Voltage input	Voltage measurement: 0-10 V DC Input impedance: 100 k $\Omega$ Measurement accuracy: $\pm$ 0.1% Measurement resolution: 3 mV at 12-bit and 1 mV at 16-bit
	Current input	Current measurement: 0-20 mA Required external resistor: 200 $\Omega$ Measurement accuracy: $\pm$ 1.1% Measurement resolution: 15 $\mu$ A at 12-bit and 5 $\mu$ A at 16-bit
	Digital input	Output current $\sim$ 1 mA


The performances stated in this sheet can be modified without any prior notice.

DESCRIPTION		RAC18-IP
Universal inputs	Resistance input	Measurement of resistance: 0-1000 kΩ Measurement resolution for 20 kΩ load: 20 Ω at 12-bit and 1 Ω at 16-bit Measurement resolution for PT1000 and NI1000: 0.1 Ω at 16-bit Resistance measurement method: voltage divider
	Temperature input	Measurement with attached RTDs (resistance temperature detectors) Accuracy: ±0.1 °C The PT1000 and NI1000 sensors use 16-bit resolution
	Measurement resolution	12-bit (default), 16-bit
	Processing time	10 ms/channel at 12-bit 140 ms/channel at 16-bit
Digital inputs	Number of inputs	4
	Type	Dry contact or fast pulse counter
	Maximum input frequency	100 Hz saved in EEPROM memory
Analog outputs	Number of outputs	3
	Voltage range	0-10 V DC
	Maximum load current	20 mA
	Resolution	12-bit
	Accuracy	±0.5%
Digital outputs	Number of outputs	5
	Resistive load (AC1)	3 A at 230 V AC or 3 A at 30 V DC
	Inductive load (AC3)	75 VA at 230 V AC or 30 W at 30 V DC
Triac outputs	Number of outputs	2
	Load	0.5 A at 20 V AC up to max. 230 V AC
	Peak load per channel	1.5 A at 20 V AC up to max. 250 V AC (30 s)
	Gate control	Zero crossing turn ON
	Frequency range	47 to 63 Hz
	Snubber	Snubberless triac
		Up to 128 devices
COM1	RS485 interface	Half- duplex
	Communication protocol	Modbus RTU, BACnet MS/TP
	Ports	RJ45 + screwless connector
	Baud rate	2400-115200
	Power supply for external device	30 V DC
ETH1	Ethernet interface	2 ports, fail-safe protected
	Communication protocol	Modbus TCP/IP, BACnet IP
	Baud rate	10/100 Mb/s
USB1	USB 2.0	USB type C
Ingress protection	IP rating	IP 20 for indoor installation
Temperature	Storage	-40°C to +85°C (-40°F to +185°F)
	Operating	0°C to +50°C (32°F to 122°F)
Humidity	Relative	5 to 95% RH (without condensation)
Screw connectors	Type	Removable screw terminals
	Maximum cable size	2.5 mm² (18...12 AWG)
Screwless connector	Type	Removable screwless terminals
	Maximum cable size	1.5 mm² (24...16 AWG)
Housing	Material	Self-extinguishing plastic (PC/ABS)
	Mounting	DIN (DIN EN 50022 norm), 2 screw holders
Dimensions	Width	123.30 mm/4.85 in
	Length	136.60 mm/5.38 in
	Height	54.50 mm/2.15 in




## Power Supply




## Communication

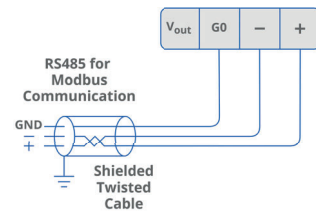




## Universal Inputs

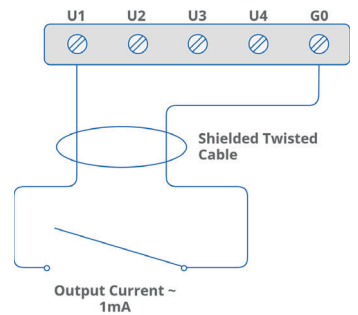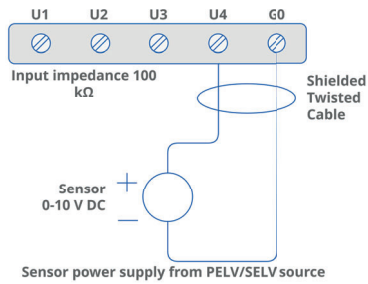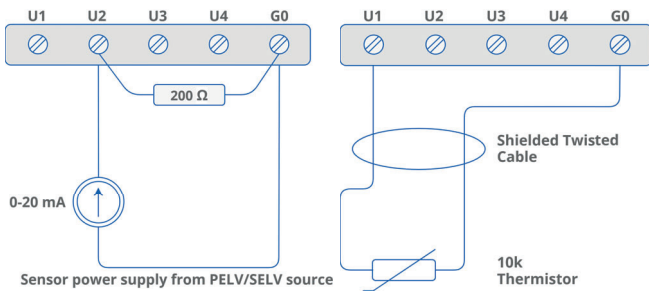





## Digital Inputs

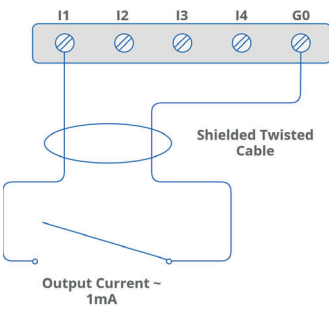


## Analog Outputs

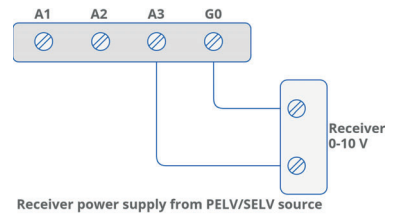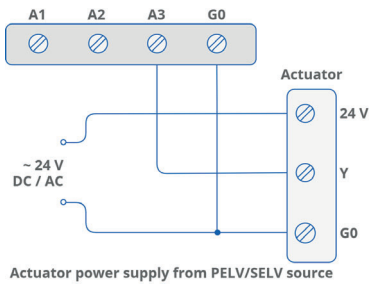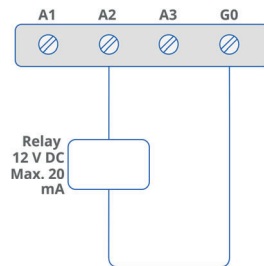


## Digital Outputs

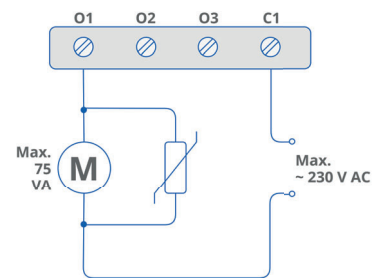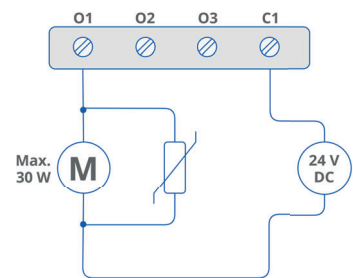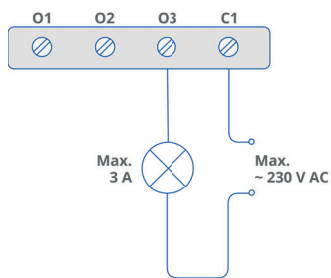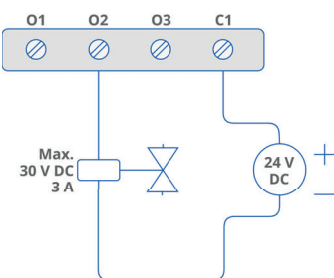

## Triac Outputs

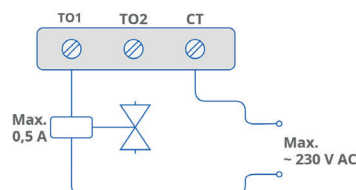

## BACnet IP/Modbus TCP/IP

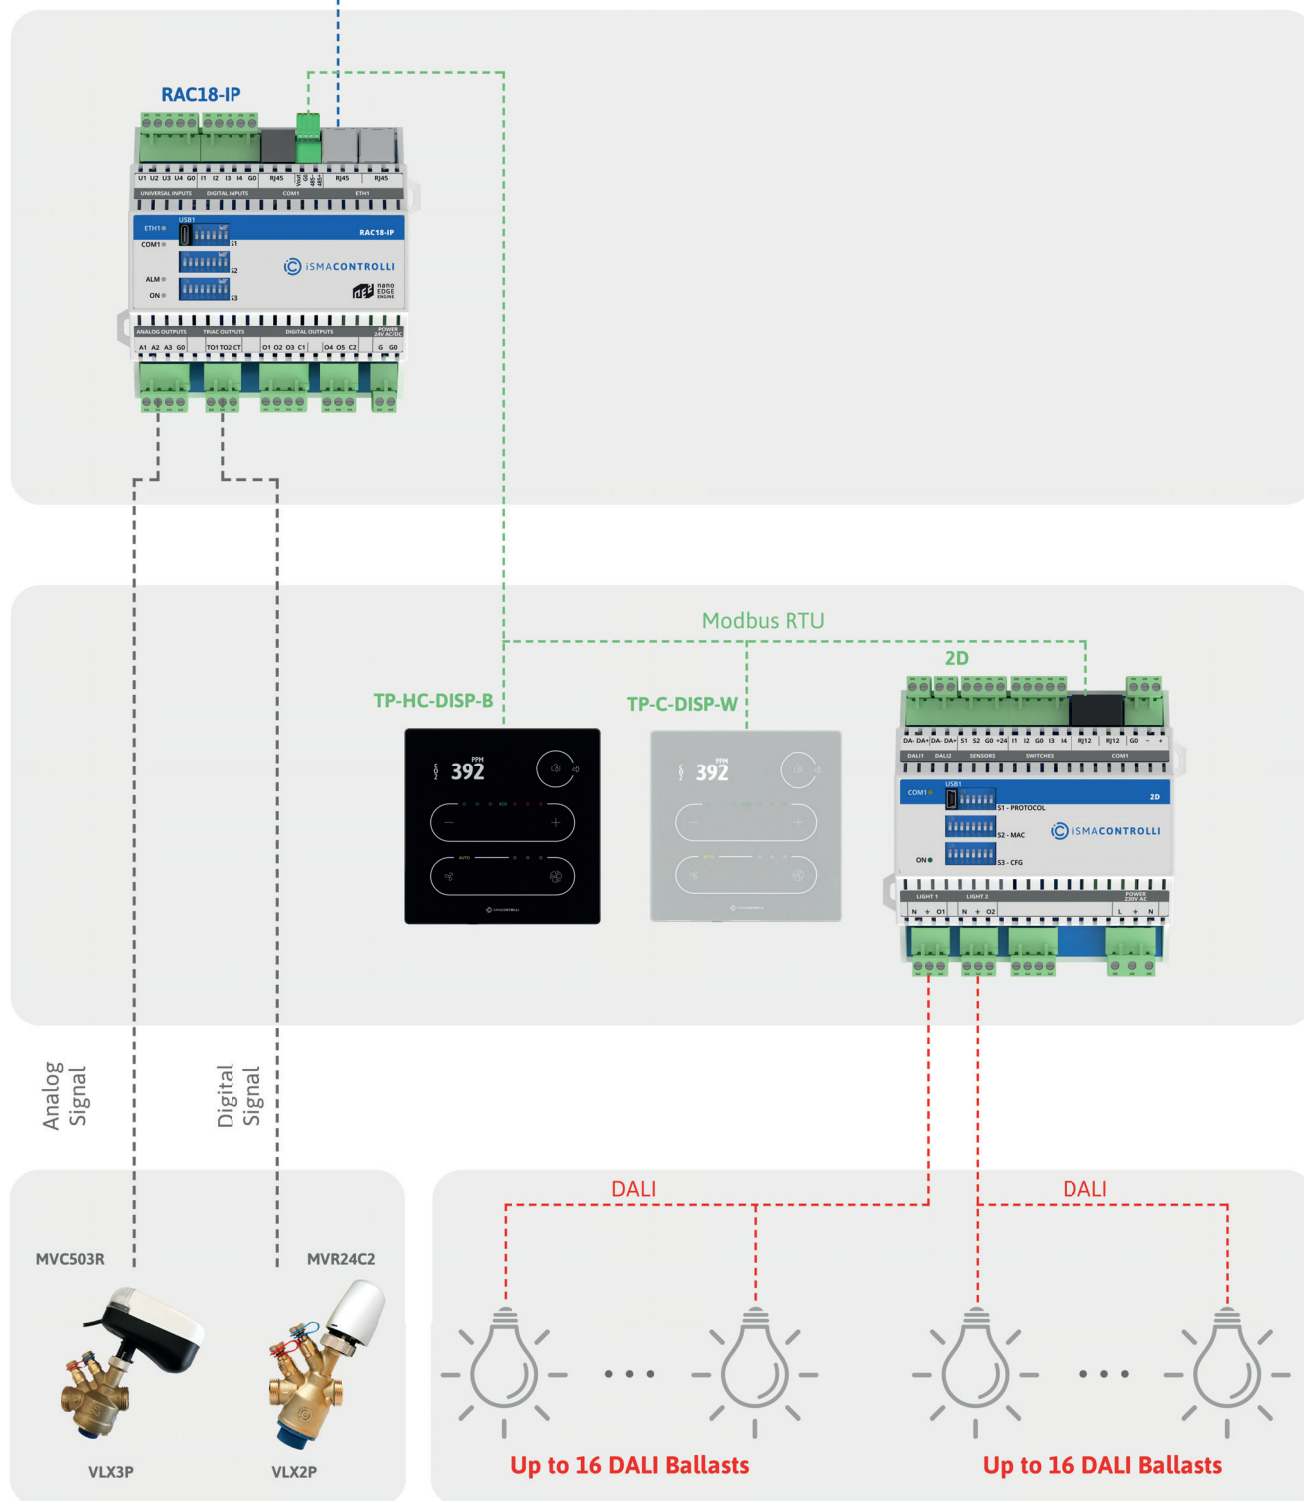

## DEDICATED SOFTWARE



iC Tool - Programming tool for devices driven by the nano EDGE ENGINE

